LUXMAN B12

MODEL

SERVICE MANUAL

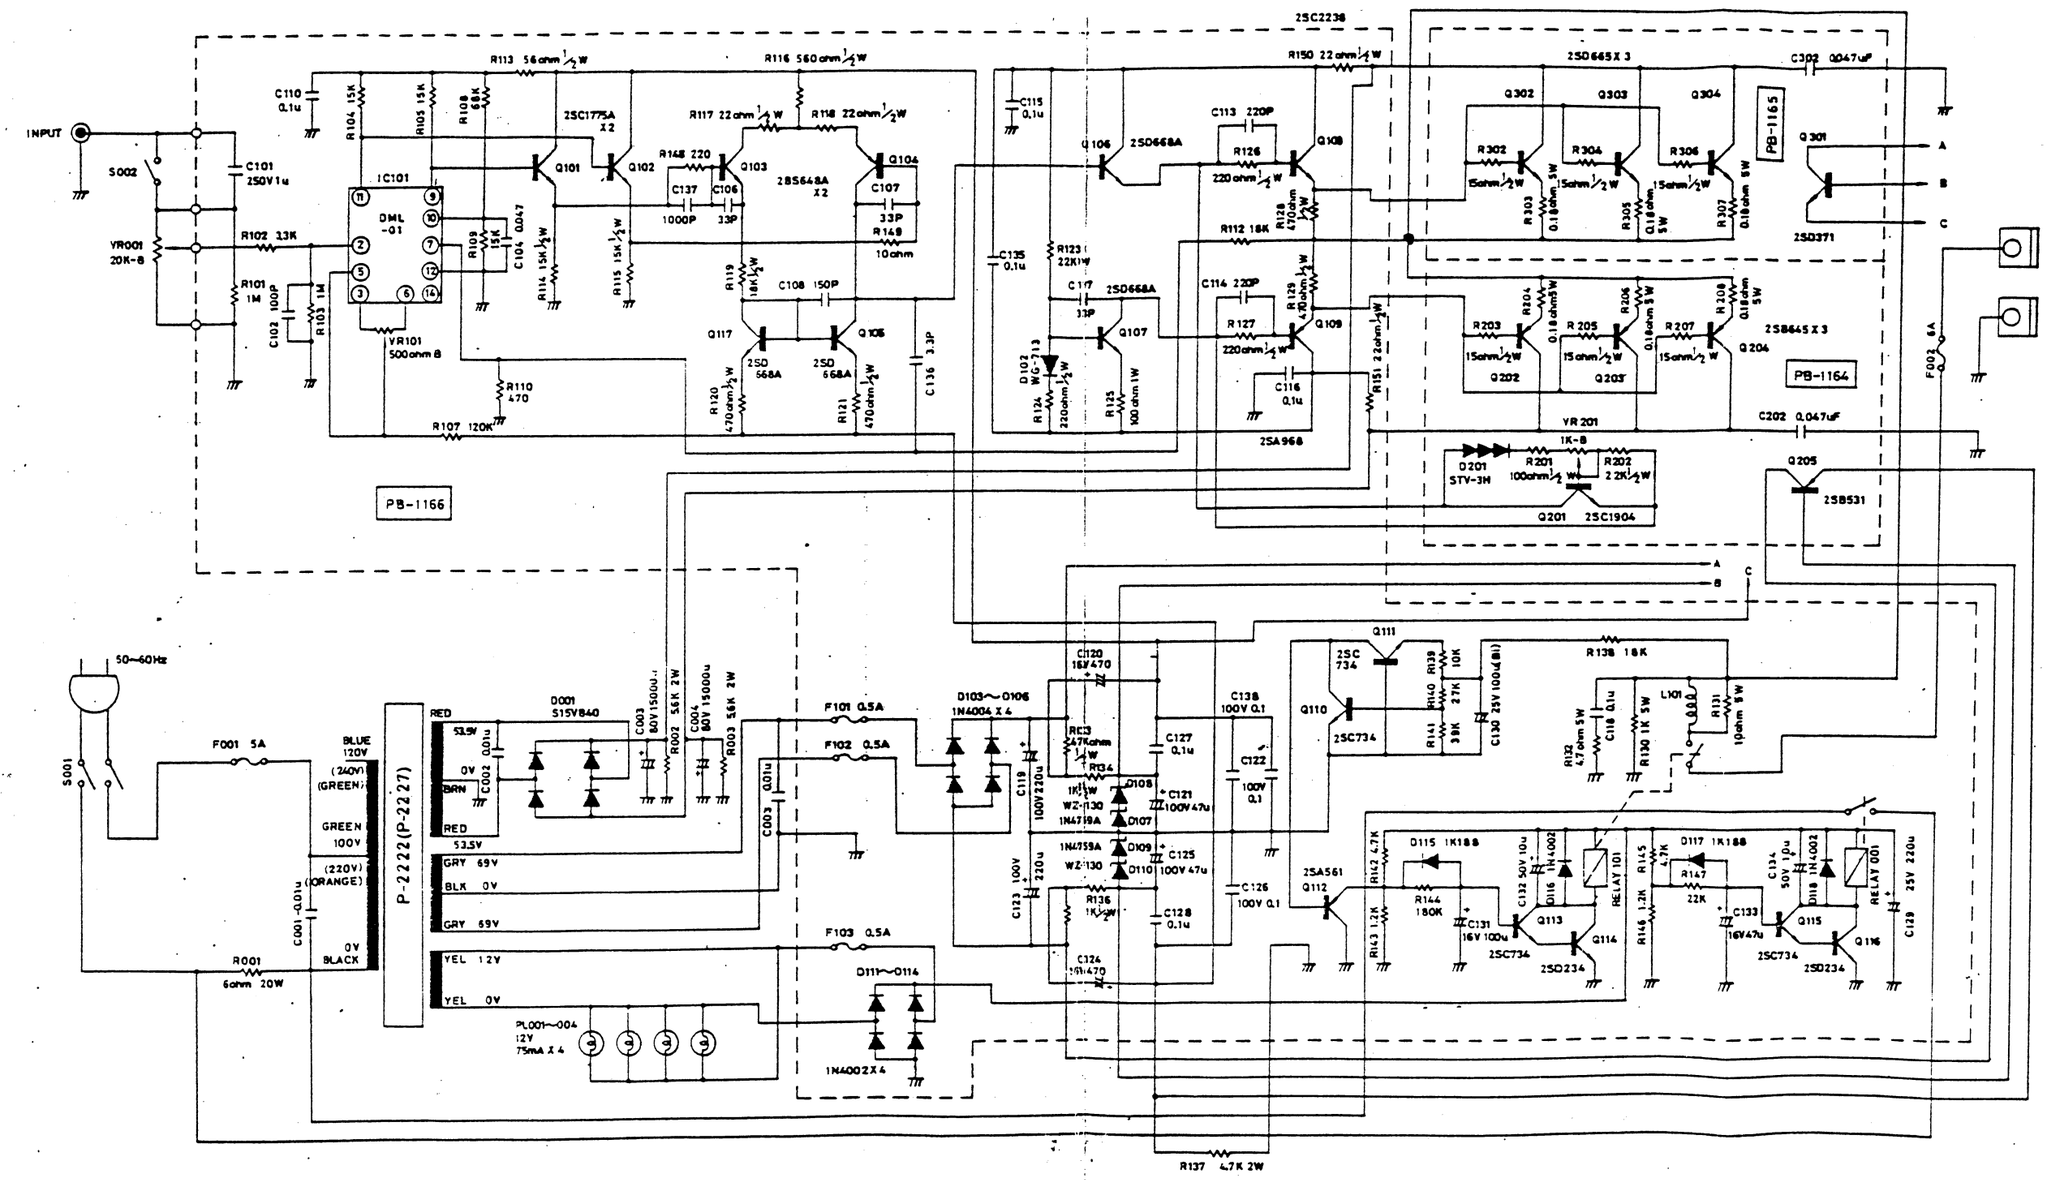

nach DML tausch.
DC offset nicht auf 0V einstellbar
Punkt 3 und 4 des DML verbinden

1. Unless otherwise specified, all resistors are in ohm 1/4 watt, all capacitors are in micro farad (uF).
2. Transistors, IC and diodes may be replaced with any types having comparable rating.
3. There might be slight changes in the actual set.

ULTIMATE HIGH FIDELITY STEREO COMPONENTS LUXMAN